


# 2500 - 4WD - DRIVER SIDE

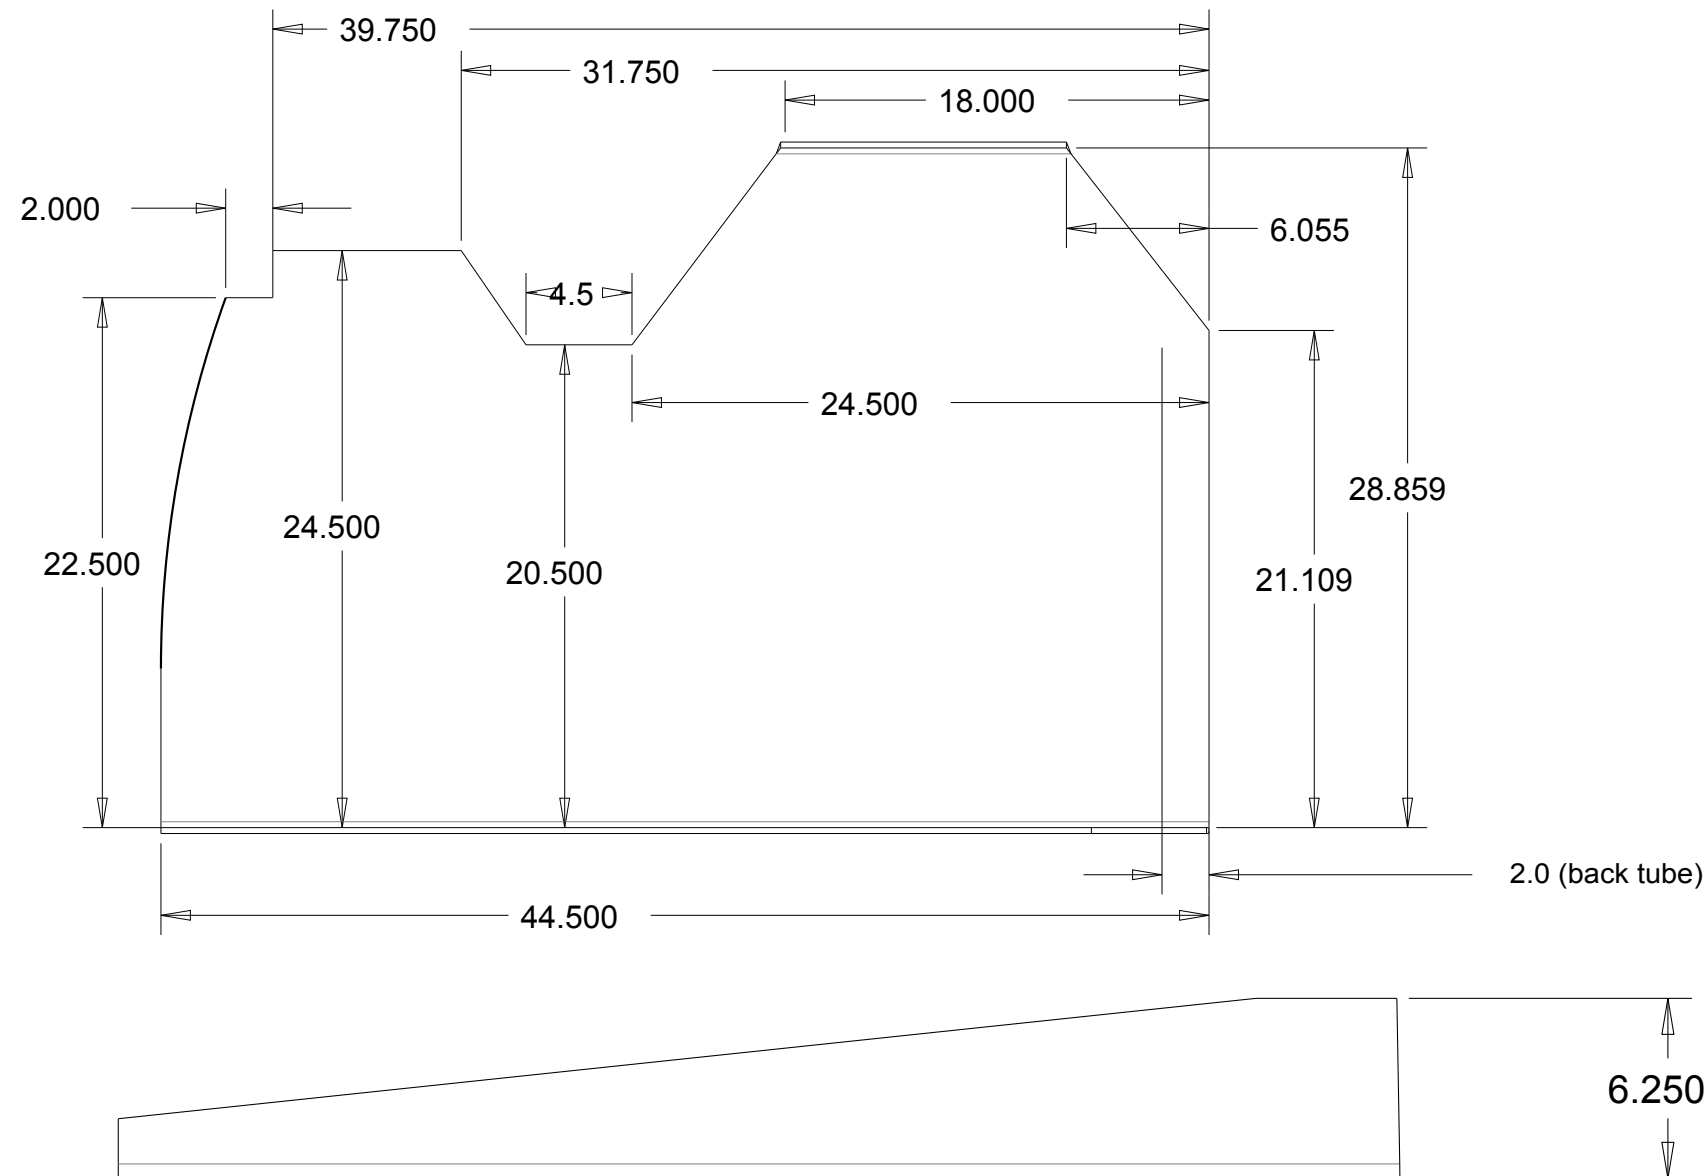

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
IR	Initial Release	1/11/16	KJS
	Driver Positioning Disclaimer	10/26/16	TZ

Driver will not be centered behind wheel. Depending on the chair, typically 2"-4" off to the left.

Distance to steering wheel will be determined by cut out in relationship to the chair.

THE INFORMATION DISCLOSED HEREIN CONTAINS PROPRIETARY RIGHTS OF ALL TERRAIN CONVERSIONS LLC. NEITHER THIS DRAWING NOR ANY INFORMATION DISCLOSED THEREIN SHALL BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS, USED OR DISCLOSED TO OTHERS FOR ANY PURPOSE EXCEPT AS SPECIFICALLY AUTHORIZED BY ALL TERRAIN CONVERSIONS IN WRITING.



DIMENSIONAL TOLERANCES UNLESS OTHERWISE NOTED			1/4 HRS		ATC Manufacturing	
BASIC DIMS	2 PLACES	3 PLACES				
UNDER 6"	+/- .02	+/- .005				
6" TO 24"	+/- .03	+/- .010			SIZE	3/4 TON 4x4 DRV PAN
24" AND UP	+/- .06	+/- .020				
ANGLES +/- 1/2°						
						FRM00473